

The Crankshaft-driven Model 100 KING Front-mount Winch Assembly For Your Willys 2WD Truck*

A CENTERED and sturdy assembly. This one-direction pulling unit can easily handle the full 8,000 pound strength of the 5/16 cable.

Approved by Willys-Overland

*Interchangeable with 4WD truck and 4 x 4 Station Wagon. Specify if for either of these vehicles, as axle-to-frame spacer blocks will then be furnished.


2214 WASHINGTON AVENUE

Koenig

PHONE Charter 6039 • HOUSTON 10, TEXAS

IRON WORKS

FEATURES

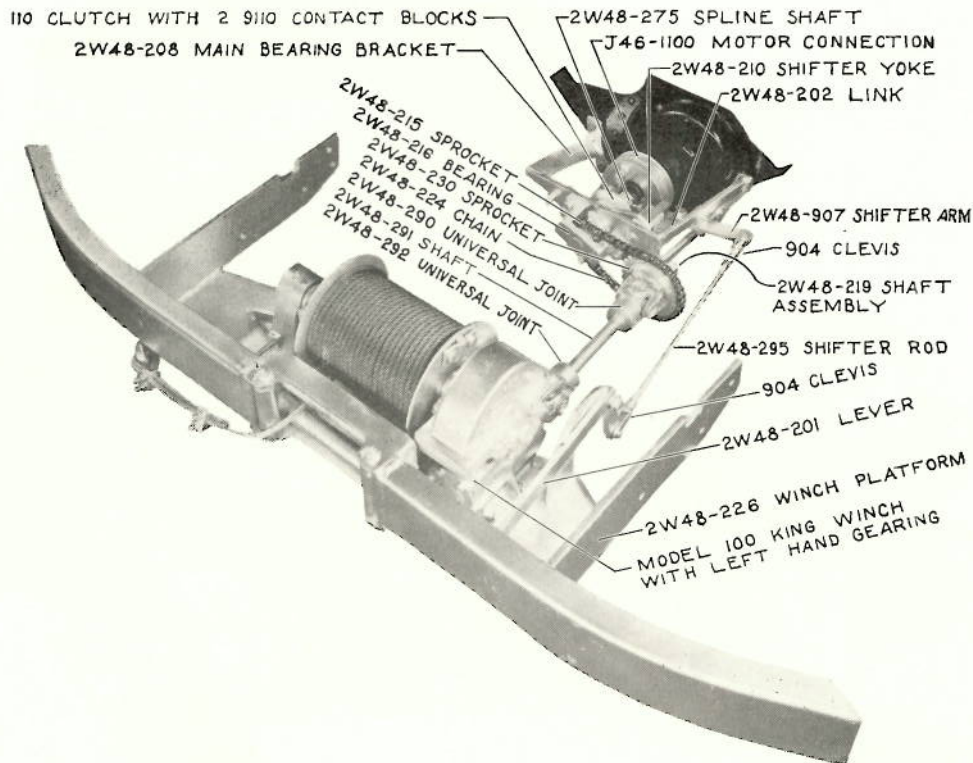

- The same time-proven Model 100 King Winch, CENTERED to give necessary balance under load.
- List price includes 150' of 5/16-in. cable with hook.
- Heavy channel iron bumper affords maximum unit protection.
- Sturdy platform side arms, secured by eight 7/16-in. bolts thru truck frame.
- Only 4 steps to install:
 1. Substitute our motor connection in place of crankshaft pulley.
 2. Bolt combined bearing support and drive sprocket onto front of motor.
 3. Bolt winch platform to truck frame.
 4. Install short drive shaft and shifter assembly.
- Patented non - slipping motor clutch prevents end thrust on crankshaft and assures shock-proof engagement.
- Back lash brake prevents fouling when cable is free-spooled.
- Ground and polished shafts.
- Timken thrust bearings.
- Self-aligning drive shaft suspension.

Weights—Winch only—49 lbs.

Weight—Complete installation including 150' 5/16 cable—190 lbs.

All King Winches Adaptable to Willys Vehicles Sold
Exclusively through Willys Distributors and Dealers

KOENIG IRON WORKS

**INSTALLATION PARTS
MODEL 100T73 KING WINCH FOR 4-473 4 x 4
WILLYS TRUCK AND STATION WAGON**

Part No.	Description	Price Each
2W48-201	Lever	2.50
2W48-202	Link75
2W48-208	Main Bearing Bracket	26.40
2W48-210	Shifter Yoke	4.70
2W48-215	Sprocket	3.20
2W48-216	Bearing	7.15
2W48-219	Shaft Assembly	5.00
2W48-219W	Washer55
2W48-224	Chain	3.10
2W48-226	Winch Platform	85.00
2W48-230	Sprocket w/Bushing	12.95
2W48-230B	Bushing65
2W48-275	Spline Shaft	4.40
2W48-290	Universal Joint— $\frac{7}{8}$ - $\frac{1}{4}$ x Flange	10.75
2W48-291	Shaft	2.20
2W48-292	Universal Joint— $\frac{7}{8}$ - $\frac{1}{4}$ x $\frac{7}{8}$ - $\frac{3}{16}$	10.75
2W48-295	Shifter Rod	1.40
2W48-907	Shifter Arm	1.40
110	Clutch	9.35
9110	Contact Blocks (2 required)85
904	Clevis (2 required)80
905	Clevis Pin (2 required)10
J46-1100	Motor Connection	10.30
2W48-299	Bag of Bolts	2.50
913	Woodruff Key29
15312	150'— $\frac{5}{16}$ " Cable w/Hook	27.22

**MODEL 100JRM AND 100JRMA KING REAR MOUNT WINCH
FOR CJ2A, CJ3A, CJ3B, CJ5 AND CJ6 WILLYS JEEPS**

JRM09	Worm Shaft Key25
JRM10	Coupling	6.60
JRM26	Winch Platform	66.00
JRM99	Bag of Bolts (100JRM Only)	3.80
JRMA99	Bag of Bolts (100 JRMA Only)	5.65
JRM105	Shaft	4.30
AO-1	Anchor Adjustment Bar	3.95
AO-2	Anchor Bar	7.50
AO-3	Forward Angle Iron	8.00
AO-4	LH Support	12.80
AO-5	RH Support	12.70
AO-6	Stiff Leg (2 required)	7.75
AO-7	Lower Frame Clamp (2 required)	3.20
AO-8	Upper LH Frame Clamp	2.50
AO-9	Upper RH Frame Clamp	3.00
AO-10	Angle Iron Bracket (2 required)	3.20
AO-11	Pin for Stiff Leg (2 required)	1.80
AO-12	Sheave Pin	1.40
AO-13	Sheave	12.25
15312	150'— $\frac{5}{16}$ " Cable w/Hook	27.22

KOENIG IRON WORKS, INC. — Houston, Texas

Prices Subject to Change Without Notice